



Air conditioners

# Heating & Cooling

Multi model application

- » **Up to five indoor units on one outdoor unit**
- » **Individual control per room**
- » **Combination of different indoor models**
- » **Inverter controlled**




[www.daikin.eu](http://www.daikin.eu)



MXS



## Combining highest efficiency and year-round comfort with a heat pump system

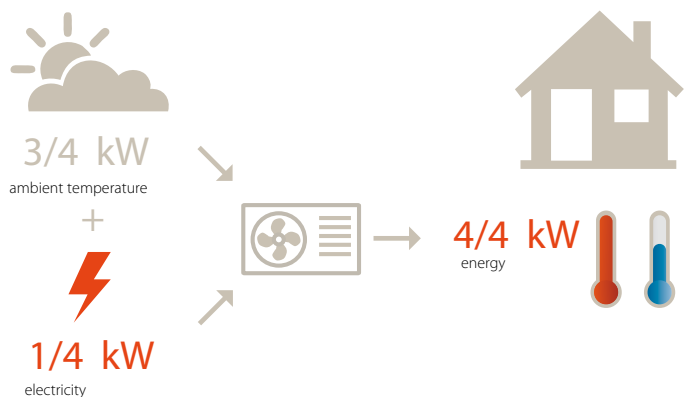

### Did you know that ...

Air conditioners, also known as heat pumps, obtain 75% of their output energy from renewable sources: the ambient air, which is both renewable and inexhaustible\*. Of course, heat pumps also require electricity to run the system, but increasingly this electricity can also be generated from renewable energy sources (solar energy, wind energy, hydropower, biomass). A heat pump's efficiency is measured in COP (Coefficient Of Performance) for heating and EER (Energy Efficiency Ratio) for cooling.

\* EU objective COM (2008)/30

## Inverter technology

Daikin's inverter technology is a true innovation in the field of climate control. The principle is simple: inverters adjust the power used to suit the actual requirement - no more, no less! This technology provides you with two concrete benefits:


### ► Comfort

The inverter repays its investment many times over by improving comfort. An air conditioning system with an inverter continuously adjusts its cooling and heating output to suit the temperature in the room thus improving comfort levels. The inverter reduces system start-up time enabling the required room temperature to be reached more quickly. As soon as the correct temperature is reached, the inverter ensures that it is constantly maintained.

### ► Energy efficient

Because an inverter monitors and adjusts ambient temperature whenever needed, energy consumption drops by 30% compared to a traditional on/off system! (non-inverter).

### Heating operation:

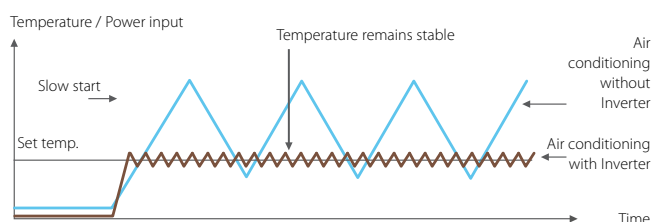

# Multi system

Multi inverter controlled outdoor units can operate with 2, 3, 4 or even 5 indoor units.



## The Benefits of a Multi system

- › **Air conditioning in every room**

A Multi system allows up to five indoor units to operate from a single outdoor unit, thereby reducing installation space and costs. All indoor units can be individually controlled and do not need to be installed in the same room or at the same time - extra units (up to a maximum of 9) can be added later.
- › **The widest choice**

Different types of indoor units — wall mounted, concealed ceiling, floor standing, cassettes etc - in different capacities can be mixed together in Multi system applications. Thus the ideal indoor unit can be selected for your bedroom, living room, office or wherever, according to the installation surface or personal requirements.
- › **An ideal indoor climate**

A single outdoor unit can heat up or cool down a complete house, office or small shop at different times. A pleasant climate can be enjoyed whilst working at the desk in the afternoon, as well as a constant temperature in the living room and cool bedrooms in the evening.

## Slim design for flexible installation

- › **A wide range of stylish indoor units can be connected to this multi outdoor unit:**

  - › **Daikin Emura:** remarkable blend of iconic design and engineering excellence is finished in brushed aluminium or matt crystal white. Daikin Emura received a good design award, IF product design award 2010 and reddot design award honourable mention 2010.
  - › **Nexura:** the first stylish floor standing unit with a unique radiant heat panel. This panel radiates additional heat to improve your comfort on cold days.
  - › **Round flow cassette with auto cleaning decoration panel:** Daikin is the first to introduce the auto cleaning cassette to the European market. This function ensures easy removal of dust with a vacuum cleaner without opening the unit resulting in lower maintenance costs. The round flow cassette received a good design award.



## Heating & Cooling

CONNECTABLE INDOOR UNITS	Wall mounted											Floor standing				Slim concealed ceiling				Flexi type				Round flow cassette				4-way blow cassette				Concealed ceiling				Ceiling suspended															
	FTXG-J			FTXS-K			CTXS-K					FTXS-J/G				FTX-JV				FVXG-K				FVXS-F				FDXS-E/C				FLXS-B				FCQG-F				FFQ-B9V				FDBQ-B/FBQ-C8				FHQ-B8			
	25	35	50	20	25	15	35	25	35	25	35	42	50	60	71	25	35	50	25	35	50	25	35	50	25	35	50	60	25	35	50	60	25	35	50	60	25	35	50	60	25	35	50	60							
2MXS40H	●	●		●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
2MXS50H	●	●		●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
3MXS40K	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
3MXS52E	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
3MXS68G	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
4MXS68F	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
4MXS80E	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				
5MXS90E	●	●		●	●	●	●	●	●	●								●	●	●	●	●	●	●	●	●	●	●	●	●	●																				

1. Following combination is not possible: 25+25+25+25  
 2. Following combination is not possible: 20+25+25+35+50, 20+25+35+35+35, 25+25+35+35+35



CONNECTABLE INDOOR UNITS				FTXG25JA		FTXG35JA		FTXG50JA	
INDOOR UNIT						Brushed aluminium			
Casing	colour								
Dimensions	unit	heightxwidthxdepth	mm	295x915x155					
Weight	unit			kg					
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	8.8/6.8/4.7/3.8		10.1/7.3/4.6/3.9		10.3/8.5/6.7/5.7	
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	9.6/7.9/6.2/5.4		10.8/8.6/6.4/5.6		11.4/9.8/8.1/7.1	
Sound power level	cooling	high	dBA	54		58		60	
	heating	high	dBA	55		58		60	
Sound pressure level	cooling	high/nom./low/silent operation	dBA	38/32/25/22		42/34/26/23		44/40/35/32	
	heating	high/nom./low/silent operation	dBA	39/34/28/25		42/36/29/26		44/40/35/32	
Refrigerant	type			R-410A					
Piping connections	liquid	OD	mm	6.35					
	gas	OD	mm	9.52				12.70	
	drain			16 or 18					
Power supply	phase / frequency / voltage			Hz / V					
				1 ~ / 50 / 220-240					



CONNECTABLE INDOOR UNITS				FTXG25JW		FTXG35JW		FTXG50JW	
INDOOR UNIT						Matt crystal white			
Casing	colour								
Dimensions	unit	heightxwidthxdepth	mm	295x915x155					
Weight	unit			kg					
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	8.8/6.8/4.7/3.8		10.1/7.3/4.6/3.9		10.3/8.5/6.7/5.7	
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	9.6/7.9/6.2/5.4		10.8/8.6/6.4/5.6		11.4/9.8/8.1/7.1	
Sound power level	cooling	high	dBA	54		58		60	
	heating	high	dBA	55		58		60	
Sound pressure level	cooling	high/nom./low/silent operation	dBA	38/32/25/22		42/34/26/23		44/40/35/32	
	heating	high/nom./low/silent operation	dBA	39/34/28/25		42/36/29/26		44/40/35/32	
Refrigerant	type			R-410A					
Piping connections	liquid	OD	mm	6.35					
	gas	OD	mm	9.52				12.70	
	drain			18					
Power supply	phase / frequency / voltage			Hz / V					
				1 ~ / 50 / 220-240					

CONNECTABLE INDOOR UNITS				FTXS20K		FTXS25K		CTXS15K		CTXS35K	
INDOOR UNIT						White		White			
Casing	colour										
Dimensions	unit	heightxwidthxdepth	mm	289x780x215				289x780x215			
Weight	unit			kg							
Fan - Air flow rate	cooling	high	m <sup>3</sup> /min	8.8/6.7/4.7/3.9		9.1/7.0/5.0/3.9		7.9/6.3/4.7/3.9		9.0/7.5/6.0/4.3	
	heating	high	m <sup>3</sup> /min	9.5/7.8/6.0/4.3		10.0/8.0/6.0/4.3		9.2/7.2/5.2/3.9		10.1/8.1/6.3/4.3	
Sound power level	cooling	high	dBA	56		57		53		58	
	heating	high	dBA	56		57		54		57	
Sound pressure level	cooling	high/nom./low/silent operation	dBA	40/32/24/19		41/33/25/19		37/31/25/21		42/35/28/21	
	heating	high/nom./low/silent operation	dBA	40/34/27/19		41/34/27/19		38/33/28/21		41/36/30/21	
Refrigerant	type			R-410A				R-410A			
Piping connections	liquid	OD	mm	6.35				6.35			
	gas	OD	mm	9.52				9.52		18.0	
	drain			18.0				18.0			
Power supply	phase / frequency / voltage			Hz / V				1 ~ / 50 / 220-240			
				1 ~ / 50 / 220-240				1 ~ / 50 / 220-240			

CONNECTABLE INDOOR UNITS				FTXS25J		FTXS35J		FTXS42J		FTXS50J		FTXS60G		FTXS71G	
INDOOR UNIT															
Casing	colour			White											
Dimensions	unit	heightxwidthxdepth	mm	295x800x215								290x1,050x250			
Weight	unit			kg											
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	10.8/7.9/5.2/3.7		11.4/8.7/5.8/4.4		11.3/9.0/6.8/5.9		11.6/9.2/7.0/6.0		16.0/13.5/11.3/10.1		17.2/14.5/11.5/10.5	
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	11.9/9.1/6.4/5.9		12.4/9.5/6.8/6.0		12.2/9.7/7.3/6.4		12.1/9.8/7.6/6.7		17.2/14.9/12.6/11.3		19.5/16.7/14.2/12.6	
Sound power level	cooling	nom.	dBA	57		61		62		61		62			
	heating	nom.	dBA	58		61		63		60		62			
Sound pressure level	cooling	high/nom./low/silent operation	dBA	41/33/25/22		45/37/29/23		45/39/33/30		46/40/34/31		45/41/36/33		46/42/37/34	
	heating	high/nom./low/silent operation	dBA	42/35/28/25		45/39/29/26		45/39/33/30		47/41/34/31		44/40/35/32		46/42/37/34	
Refrigerant	type			R-410A											
Piping connections	liquid	OD	mm	6.35				6.35				6.35			
	gas	OD	mm	9.52				9.52		12.7		12.7		15.9	
	drain			18.0				18.0				18.0			
Power supply	phase / frequency / voltage			Hz / V											
				1 ~ / 50 / 220-240											



CONNECTABLE INDOOR UNITS				FTX20JV	FTX25JV	FTX35JV
INDOOR UNIT						
Casing	Colour			White		
Dimensions	Unit	HeightxWidthxDepth	mm	283x770x198		
Weight	Unit		kg	7		
Fan - Air flow rate	Cooling	High/Nom./Low/Silent operation	m <sup>3</sup> /min	9.1/7.4/5.9/4.7	9.2/7.6/6.0/4.8	9.3/7.7/6.1/4.9
	Heating	High/Nom./Low/Silent operation	m <sup>3</sup> /min	9.4/7.8/6.3/5.5	9.7/8.0/6.3/5.5	10.1/8.4/6.7/5.7
Sound power level	Cooling	Nom.	dB(A)	55	56	57
	Heating	Nom.	dB(A)	55	56	57
Sound pressure level	Cooling	High/Nom./Low/Silent operation	dB(A)	39/33/25/22	40/33/26/22	41/34/27/23
	Heating	High/Nom./Low/Silent operation	dB(A)	39/34/28/25	40/34/28/25	41/35/29/26
Refrigerant	Type			R-410A		
Piping connections	Liquid	OD	mm	6.35		
	Gas	OD	mm	9.52		
	Drain	OD	mm	18		
Power supply	Phase / Frequency / Voltage			1~ / 50 / 220-240		



CONNECTABLE INDOOR UNITS				FVXG25K	FVXG35K	FVXG50K
INDOOR UNIT						
Casing	colour			Fresh white (6.5Y 9.5/0.5)		
Dimensions	unit	heightxwidthxdepth	mm	600x950x215		
Weight	unit		kg	22		
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	8.9/7.0/5.3/4.5	9.1/7.2/5.3/4.5	10.6/8.9/7.3/6.0
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	9.9/7.8/5.7/4.7	10.2/8.0/5.8/5.0	12.2/10.0/7.8/6.8
Sound power level	cooling	nom.	dB(A)	54	55	56
	heating	nom.	dB(A)	55	56	58
Sound pressure level	cooling	high/nom./low/silent operation	dB(A)	38/32/26/23	39/33/27/24	44/40/36/32
	heating	high/nom./low/silent operation/radiant heat	dB(A)	39/32/26/22/19	40/33/27/23/19	46/40/34/30/20
Refrigerant	type			R-410A		
Piping connections	liquid	OD	mm	6.35		
	gas	OD	mm	9.50		12.70
	drain			18		
Power supply	phase / frequency / voltage			1~ / 50 / 220-240		



CONNECTABLE INDOOR UNITS				FVXS25F	FVXS35F	FVXS50F
INDOOR UNIT						
Casing	colour			White		
Dimensions	unit	heightxwidthxdepth	mm	600x700x210		
Weight	unit		kg	14		
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	8.2/6.5/4.8/4.1	8.5/6.7/4.9/4.5	10.7/9.2/7.8/6.6
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	8.8/6.9/5.0/4.4	9.4/7.3/5.2/4.7	11.8/10.1/8.5/7.1
Sound power level	cooling	high	dB(A)	54	55	56
	heating	high	dB(A)	54	55	57
Sound pressure level	cooling	high/nom./low/silent operation	dB(A)	38/32/26/23	39/33/27/24	44/40/36/32
	heating	high/nom./low/silent operation	dB(A)	38/32/26/23	39/33/27/24	45/40/36/32
Refrigerant	type			R-410A		
Piping connections	liquid	OD	mm	6.35		
	gas	OD	mm	9.52		12.7
	drain			20		
Power supply	phase / frequency / voltage			1~ / 50 / 220-240		



CONNECTABLE INDOOR UNITS				FLXS25B	FLXS35B	FLXS50B	FLXS60B
INDOOR UNIT							
Casing	Colour			Almond white			
Dimensions	Unit	HeightxWidthxDepth	mm	490x1,050x200			
Weight	Unit		kg	16		17	
Fan - Air flow rate	Cooling	High/Nom./Low/Silent operation	m <sup>3</sup> /min	7.6/6.8/6.0/5.2	8.6/7.6/6.6/5.6	11.4/10.0/8.5/7.5	12.0/10.7/9.3/8.3
	Heating	High/Nom./Low/Silent operation	m <sup>3</sup> /min	9.2/8.3/7.4/6.6	9.8/8.9/8.0/7.2	12.1/9.8/7.5/6.8	12.8/10.6/8.4/7.5
Sound power level	Cooling	High	dB(A)	53	54	63	64
	Heating	High	dB(A)	53	55	62	63
Sound pressure level	Cooling	High/Nom./Low/Silent operation	dB(A)	37/34/31/28	38/35/32/29	47/43/39/36	48/45/41/39
	Heating	High/Nom./Low/Silent operation	dB(A)	37/34/31/29	39/36/33/30	46/41/35/33	47/42/37/34
Refrigerant	Type			R-410A			
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	9.52		12.7	
	Drain			18			
Power supply	Phase / Frequency / Voltage			1~ / 50/60 / 220-240/220-230			



CONNECTABLE INDOOR UNITS				FDXS25E	FDXS35E	FDXS50C	FDXS60C
INDOOR UNIT				Unpainted			
Casing	colour						
Dimensions	unit	heightxwidthxdepth	mm	200x700x620		200x900x620	200x1,100x620
Weight	unit		kg	21.0		27.0	30.0
Fan - Air flow rate	cooling	high/nom./low/silent operation	m <sup>3</sup> /min	8.7/8.0/7.3/6.2		12.0/11.0/10.0/8.4	16.0/14.8/13.5/11.2
	heating	high/nom./low/silent operation	m <sup>3</sup> /min	8.7/8.0/7.3/6.2		12.0/11.0/10.0/8.4	16.0/14.8/13.5/11.2
Fan - External static pressure	nom.		Pa	30		40	
Sound power level	cooling	high	dBA	53.0		55.0	56.0
	heating	high	dBA	53.0		55.0	56.0
Sound pressure level	cooling	high/nom./low/silent operation	dBA	35.0/33.0/31.0/29.0		37.0/35.0/33.0/31.0	38.0/36.0/34.0/32.0
	heating	high/nom./low/silent operation	dBA	35.0/33.0/31.0/29.0		37.0/35.0/33.0/31.0	38.0/36.0/34.0/32.0
Refrigerant	type			R-410A			
Piping connections	liquid	OD	mm	6.35			
	gas	OD	mm	9.52		12.7	
	drain			VP20 (I.D. 20/O.D. 26)			
Power supply	phase / frequency / voltage		Hz / V	1~ / 50/60 / 220-240/220-230			



CONNECTABLE INDOOR UNITS				FDBQ25B
INDOOR UNIT				Unpainted
Dimensions	unit	heightxwidthxdepth	mm	230x652x502
Weight	unit		kg	17.0
Fan - Air flow rate	cooling	high/low	m <sup>3</sup> /min	6.50/5.20
	heating	high/low	m <sup>3</sup> /min	6.95/5.20
Sound power level	cooling	high/low	dBA	55.0/49.0
	heating	high/low	dBA	55.0/49.0
Sound pressure level	cooling	high/low	dBA	35.0/28.0
	heating	high/low	dBA	35.0/29.0
Refrigerant	type			R-410A
Piping connections	liquid	OD	mm	6.35
	gas	OD	mm	9.52
	drain			27.2
Power supply	phase / frequency / voltage		Hz / V	1~ / 50 / 230



CONNECTABLE INDOOR UNITS				FBQ35C8	FBQ50C8	FBQ60C8
INDOOR UNIT				Unpainted		
Dimensions	unit	heightxwidthxdepth	mm	300x700x700		300x1,000x700
Required ceiling void >			mm	25		34
Weight	unit		kg	350		34
Decoration panel	model			BYBS45DJW1		BYBS71DJW1
	colour			White (10Y9/0.5)		
	dimensions	heightxwidthxdepth	mm	55x800x500		55x1,100x500
Fan - Air flow rate	cooling	high/low	m <sup>3</sup> /min	3.5		4.5
	heating	high/low	m <sup>3</sup> /min	16/11		18/15
Fan - External static pressure	high/nom.		Pa	16/11		18/15
	cooling	high	dBA	63		57
Sound power level	heating	high	dBA	-		
	cooling	high/low	dBA	37/29		
Sound pressure level	heating	high/low	dBA	37/29		
	cooling	high/low	dBA	-		
Refrigerant	type			R-410A		
Piping connections	liquid	OD	mm	6.35		
	gas	OD	mm	9.52		12.70
	drain			VP25 (O.D. 32 / I.D. 25)		
Power supply	phase / frequency / voltage		Hz / V	1~ / 50/60 / 220-240/220		



CONNECTABLE INDOOR UNITS				FFQ25B9V	FFQ35B9V	FFQ50B9V	FFQ60B9V
<b>INDOOR UNIT</b>							
Casing	colour			Unpainted			
Dimensions	unit	heightxwidthxdepth	mm	286x575x575			
Weight	unit		kg	17.5			
Decoration panel	model			BYFQ60BW1			
	colour			Pure white (RAL9010)			
	dimensions	heightxwidthxdepth	mm	55x700x700			
	weight		kg	2.7			
Fan - Air flow rate	cooling	high/low	m <sup>3</sup> /min	9.0/6.5	10.0/6.5	12.0/8.0	15.0/10.0
	heating	high/low	m <sup>3</sup> /min	-	-	-	-
Sound power level	cooling	high	dBA	46.5	49.0	53.0	58.0
	heating	high	dBA	-	-	-	-
Sound pressure level	cooling	high/low	dBA	29.5/24.5	32.0/25.0	36.0/27.0	41.0/32.0
	heating	high/low	dBA	-	-	-	-
Refrigerant	type			R-410A			
Piping connections	liquid	OD	mm	6.35			
	gas	OD	mm	9.52			12.7
	drain			VP20 (I.D.20/O.D.26)			
Power supply	phase / frequency / voltage		Hz / V	1~ / 50 / 220-240			



CONNECTABLE INDOOR UNITS				FCQG35F	FCQG50F	FCQG60F
<b>INDOOR UNITS</b>						
Dimensions	unit	heightxwidthxdepth	mm	204x840x840		
Weight	unit		kg	18		
Decoration panel	model			BYCQ140D7W1 <sup>1</sup> / BYCQ140D7W1W <sup>2</sup> / BYCQ140D7GW1 <sup>3</sup>		
	colour			Pure White(RAL 9010)		
	dimensions	heightxwidthxdepth	mm	60x950x950 / 60x950x950 / 145x950x950		
	weight		kg	5.4/5.4/10.3		
Sound power level	cooling	high	dBA	49		51
Sound pressure level	cooling	high/nom/low	dBA	31/29/27		33/31/28
	heating	high/nom/low	dBA	31/29/27		33/31/28
Refrigerant	type			R-410A		
Piping connections	liquid	OD	mm	6.35		
	gas	OD	mm	9.52		12.7
	drain			VP25 (O.D.32/I.D.25)		
Power supply	phase / frequency / voltage		Hz / V	1~ / 50 / 220-240		

<sup>1</sup> Pure white standard panel with grey louvers

<sup>2</sup> Pure white standard panel with white louvers

<sup>3</sup> Pure white auto cleaning panel



CONNECTABLE INDOOR UNITS				FHQ35B8	FHQ50B8	FHQ60B8
<b>INDOOR UNIT</b>						
Casing	colour			White		
Dimensions	unit	heightxwidthxdepth	mm	195x960x680		
Weight	unit		kg	24	25	27
Fan - Air flow rate	cooling	high/low	m <sup>3</sup> /min	13/10		17/13
	heating	high/low	m <sup>3</sup> /min	13/10		16/13
Sound power level	cooling	high/low	dBA	53/48	54/49	55/49
	heating	high/low	dBA	53/48	54/49	55/49
Sound pressure level	cooling	high/low	dBA	37/32	38/33	39/33
	heating	high/low	dBA	37/32	38/33	39/33
Refrigerant	type			R-410A		
Piping connections	liquid	OD	mm	6.35		
	gas	OD	mm	9.52		12.70
	drain			VP20 (I.D. 20/O.D. 26)		
Power supply	phase / frequency / voltage		Hz / V	1~ / 50 / 220-240		



NEW

CONNECTABLE OUTDOOR UNITS				NEW								
OUTDOOR UNIT				2MXS40H	2MXS50H	3MXS40K	3MXS52E	3MXS68G	4MXS68F	4MXS80E	5MXS90E	
Dimensions	unit	heightxwidthxdepth	mm	550x765x285		735x826x300		735x826x300		770x900x320		
Weight	unit		kg	38	42	49	49	58		72	73	
Fan - Air flow rate	cooling	high/nom./low	m <sup>3</sup> /min	36/33/30	37/34/34	45/-/41	45/-/45	52.7/49.4/43.5		54.5/-/46.0	57.1/54.5/46.0	
	heating	high/nom./low	m <sup>3</sup> /min	32/32/32	34/34/34	45/-/41	45/-/41	46.4/44.5/16.3		46.0/-/14.7	52.5/-/14.7	
Sound power level	cooling	high/nom.	dB(A)	-/62	-/63	59/-	-/59	-/61		-/62	-/66	
Sound pressure level	cooling	nom.	dB(A)	47	48	46	46	48		52		
	heating	nom.	dB(A)	48	50	47	47	49		52		
Operation range	cooling	ambient	Min.-Max. °CDB	10~46		-10~46		-10~46		-10~46		
	heating	ambient	Min.-Max. °CWB	-15~-15.5		-15~-15.5		-15~-15.5		-15~-15.5		
Refrigerant	type			R-410A		R-410A		R-410A		R-410A		
Piping connections	liquid	OD	mm	6.35		6.35x3		6.35		6.35		
	gas	OD	mm	9.52		9.52x3		9.52		9.52		
	drain	OD	mm	18		18		18		25		
	level difference	IU - OU	Max.	m	15		15		15		15	
		IU - IU	Max.	m	7.5		7.5		7.5		7.5	
	heat insulation				Both liquid and gas pipes							
	total piping length	system	Actual	m	30		30		60	70	75	
Power supply	phase / frequency / voltage		Hz / V	1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Fan coil units (FCU) and Air handling units (AHU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin products are distributed by: