



CO₂ ZEAS

Refrigeration condensing units



For commercial and industrial applications

Food retail, horeca, logistic & distribution center and more.

CO₂ ZEAS condensing units

the smart choice for medium and low temperature refrigeration
featuring proven ZEAS technology

- › Perfect solution for all cooling and freezing applications with variable load conditions and high energy efficiency requirements. Particularly for use in supermarkets, cold storage, blast coolers and freezers, process etc.
- › BLDC inverter swing compressor with onboard 2 stage technology with intercooler
- › Reduced CO₂ emissions thanks to the use of natural refrigerant (CO₂) and low energy consumption
- › Factory tested and pre-programmed for quick and easy installation and commissioning
- › Increased installation flexibility thanks to limited dimensions
- › Low sound level including “night mode” operation

High energy savings potential

- ✓ Highly efficient operation
- ✓ Cuts energy consumption compared to traditional refrigeration equipment
- ✓ Advanced Daikin BLCD inverter swing compressor technology precisely adapts to the system's needs, protected by 4 patents
- ✓ Eco-design compliant

Intelligent control

- ✓ Can be connected to a third party monitoring system
- ✓ Refrigeration unit can be controlled remotely through a powerful interface
- ✓ Remote control of target evaporation temperature, reset errors and other functions

Comfort

- ✓ Quiet operation, unobtrusive for customers and neighbours
 - › High grade sound insulation on compressors
 - › Condenser fans designed to limit noise
 - › Two low noise operation settings including night mode
- ✓ Wide temperature range (-40°C to +5°C) allows multiple cabinet, freezer and cold room combinations
- ✓ Unified model for freezing, cooling and/or refrigerating applications

Reliable operation

- ✓ CO₂ ZEAS condensing units are rigorously tested on the assembly line
- ✓ Proven inverter swing technology
- ✓ Anti-corrosion treatment on the housing ensures long life even in extreme conditions
- ✓ Daikin condensing units are at the heart of refrigeration applications such as food retail, food processing, logistic center, pharmaceutical and more

Smart refrigeration

with additional advantages

Small footprint

- › Extremely compact design
- › Best surface to capacity ratio on the market
- › Easy to install in the smallest spaces
- › Indoor installation possible
- › Minimal space required between units in multi-unit installations

Fully packaged



- › Component selection risk reduced to zero
- › Leak testing and run test in factory
- › Built-in controls ensure optimum operation and unit safety

Wide temperature range

- › Precise evaporating temperatures from -40°C to $+5^{\circ}\text{C}$ depending on the application

Comprehensive support

- › Daikin provides comprehensive service and maintenance tools

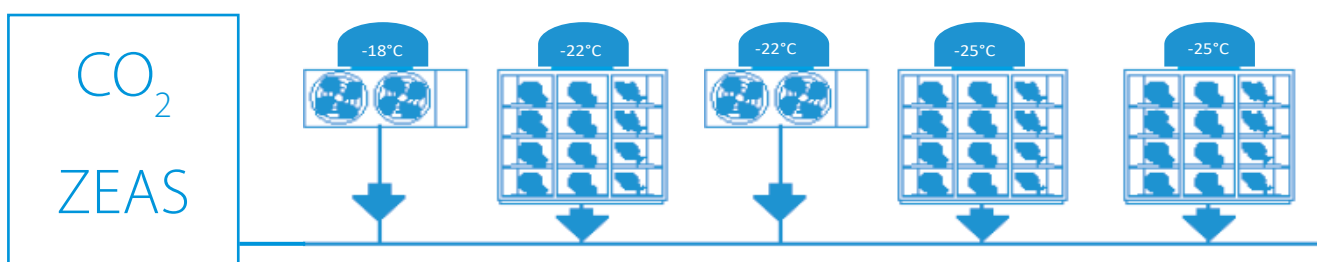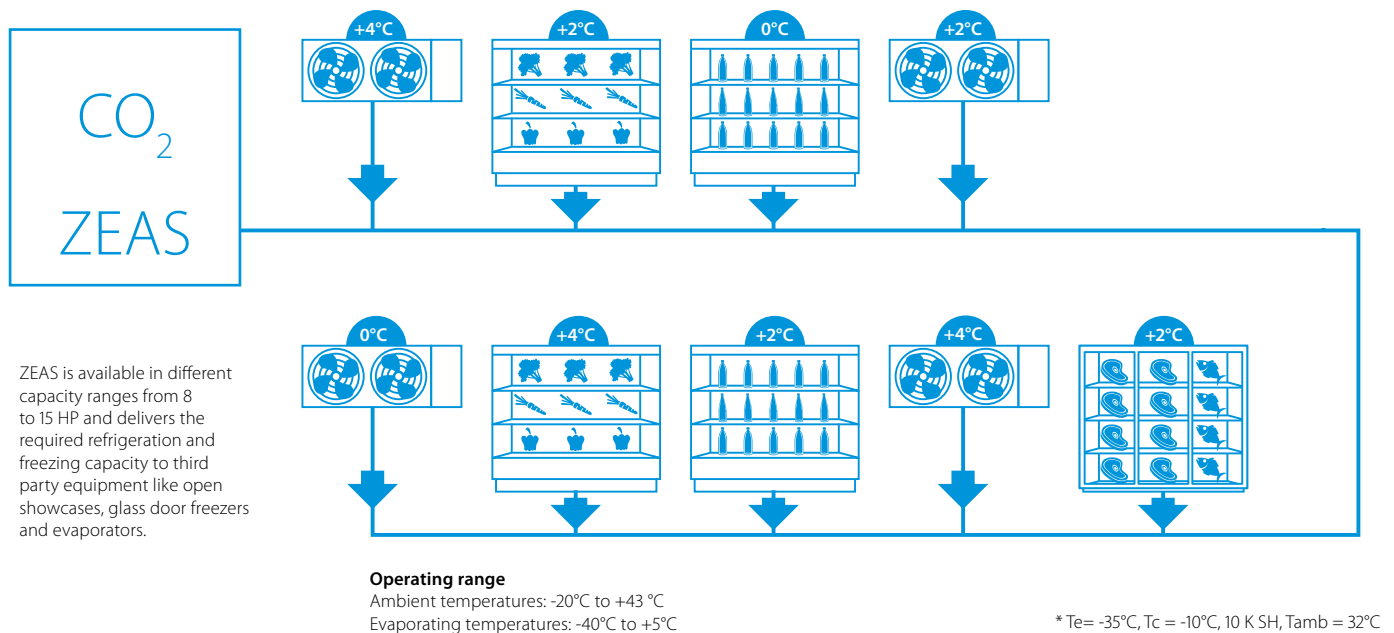

Technical specifications CO₂ ZEAS range

LREN-47Y1B							LREN847Y1B			LREN1047Y1B			LREN1247Y1B			LREN1247Y1B + LRNUN5A7Y1								
Capacity range							HP			8			10			12			15					
							kW			11,2			13,5			15,5			17,3					
Refrigerating capacity							Nom. @3			11,2			13,5			15,5			17,3					
							kW			19,8			23,1			26,3			31,7					
Power Input							Nom. @3			11,6			14,1			16,9			18,6					
							kW			10,7			13,2			15,5			20,1					
COP							Nom. @3			0,97			0,96			0,92			0,93					
							kW			1,86			1,75			1,69			1,58					
Annual electricity consumption Q							Nom. @4			33.068			41.161			49.383			61.738					
							Te = -10°C			kWh/a			48.504			61.084			73.883			85.048		
Seasonal energy performance ratio SEPR							Te = -35°C			3,68			3,45			3,27			3,16					
							Te = -10°C			kW			1,72			1,64			1,59			1,54		
							Te = -35°C			19,8			23,1			26,3			31,7					
							Cooling capacity (PA)			kW			10,7			13,2			15,5			20,1		
Parameters at full load and ambient temp. 32°C (Point A)							Rated power input (DA)			1,86			1,75			1,69			1,58					
							Rated COP (COP A)			kW			11,2			13,5			15,5			17,3		
							Cooling capacity (PA)			kW			11,6			14,1			16,9			18,6		
							Rated power input (DA)			kW			0,97			0,96			0,92			0,93		
							Rated COP (COP A)			kW			15,8			17,5			19			24,3		
							Cooling capacity (P3)			kW			12,9			14,8			15,1			23,8		
							Rated power input (D3)			kW			1,23			1,18			1,26			1,02		
							Rated COP (COP3)			kW			9			10,6			12,2			13,2		
Parameters at full load and ambient temp. 43°C							Cooling capacity (P3)			12,8			15,6			17,6			23,2					
							Rated power input (D3)			kW			0,7			0,68			0,69			0,57		
							Rated COP (COP3)			mm			1680						2565 (1930 + 635)					
							Height			mm			1930			765								
Unit							Width																	
							Depth			mm														
Weight							Unit			kg			547			720								
							Type			rps			Hermetically sealed swing compressor			Hermetically sealed swing compressor			Hermetically sealed swing compressor					
Compressor							Modulation speed			max			90			90								
										min			20			20								
							Output			W			4600			4600								
							Piston displacement			m³/h			6,16			6,16								
							Crankcase heater			output			32			32								
							Motor			W														
Compressor 2							Type			Hermetically sealed swing compressor			Hermetically sealed swing compressor											
							Output			W			4600			4600								
							Piston displacement			m³/h			6,16			6,16								
							Starting method						Direct on line (Inverter driven)			Direct on line (Inverter driven)								
Compressor 3							Type			Hermetically sealed swing compressor			Hermetically sealed swing compressor											
							Output			W			4600			4600								
							Piston displacement			m³/h			6,16			6,16								
							Starting method						Direct on line (Inverter driven)			Direct on line (Inverter driven)								
Q-up compressor							Type			-			-			-								
							max			rps			-			90								
							min			rps			-			20								
							W			W			-			4600								
							Piston displacement			m³/h			-			6,16								
							Starting method						Direct on line (Inverter driven)			Direct on line (Inverter driven)								

LREN-A7Y1B															LREN8A7Y1B		LREN10A7Y1B		LREN12A7Y1B		LREN12A7Y1B + LRNUN5A7Y1	
Fan	Type												Propeller fan									
	Diameter										mm		541									
	Quantity												1									
Fan motor	Air flow rate	Cooling	Nom.				m³/min		285 @6		315 @6		417 @6									
	Output										W		750 @7		750 & 350 @7							
	Drive										Direct drive											
Operation range	Evaporating temp.	Min.										°C		-40		-20						
		Max.										°C		5		0						
	Ambient temp.	Min.										°CDB		-20								
		Max.										°CDB		43								
Refrigerant	Type										R744 (CO2)											
	GWP										1											
	Charge										kg											
	Control										Electronic expansion valve											
Piping connections	Refrigeration	gas		OD		mm		19,1		22,2												
		liquid		OD		mm				15,9												
	Level difference	OU - IU		Indoor unit in highest position				m		10												
				Outdoor unit in highest position				m		35												
	Suction	Superheat										K		10 K or more								
Maximum piping length	MT										m		130									
	LT										m		100									
Design pressure	HP side										bar		120									
	Liquid line connection										bar		90									
	Receiver										bar		90									
	Suction line connection										bar		90									
Sound pressure level	Nom.										dB(A)		61	62	64	65						

1 Minimum load of each individual refrigeration indoor unit: 3 kW (for Medium Temperature Operation)

2 Minimum load of each individual refrigeration indoor unit: 3 kW (for Low Temperature Operation)

3 Rated conditions: saturation temperature equivalent to suction pressure: -35°C (LT), outdoor temp. 32°C, suction SH 10 K

4 Rated conditions for chilled side: saturation temperature equivalent to suction pressure: -10°C (MT), outdoor temp. 32°C, suction SH 10 K

5 Every compressor equipped with 1 accumulator of 0,909 liters

6 Outdoor Unit Total Airflow

7 Output (maximum rating) of one fan motor if winding temperature is 120°C or less (main fans & Q-up fan)

8 A small amount of refrigerant could be left in the unit

9 Compressor 1

10 Compressor 2

11 Compressor 3

12 Factory charge of the unit

notes

Acting ahead of legislation

Staying ahead of increasingly tough legislation and regulations around the world is one of the driving forces behind our investment in refrigeration technology. It is also what makes Daikin a leader in innovation.

F-gas regulation

The new F-gas regulations, which focus on direct emissions, came into force at the beginning of 2015. Daikin ZEAS condensing units meet all the legislative requirements for end-of-life emissions, as well as for emissions during a unit's lifecycle.

Ecodesign Directive

The EU's Ecodesign Directive 2009/125/EC is designed to encourage the market to use more efficient products. It also helps manufacturers to agree a better definition of efficiency for remote condensing units. Since 01/07/2016 refrigeration units also need to comply to this system of minimum efficiency requirements.

› inverter swing capacity control

We have incorporated inverter technology into our CO₂ ZEAS to give optimum control of fluctuating loads in refrigerated cabinets. This delivers lower energy losses than traditional refrigeration units.

› Economiser function

The economiser function in our refrigeration products delivers two main benefits. It increases the unit's capacity while less absorbed power is required. At the same time, it also decreases the discharge temperature, increasing the lifetime of the compressor.

› Adaptable evaporation temperature

To lower energy consumption, the configured evaporation temperature of CO₂ ZEAS can be increased through an external signal.


At closing time, night curtains are lowered, reducing the load to 1/3. This means that the evaporator coil is now oversized and there is a risk of freezing the goods. To avoid this, the evaporation temperature of CO₂ ZEAS can be increased.

Tools and platforms

Here are a few handy tools to help you to find the Daikin products you need and how to get the best out of them.


Refrigeration Xpress software

User-friendly, easy to understand design software for Conveni-Pack and ZEAS. Its detailed report includes a list of materials, piping and wiring diagrams, and device options.

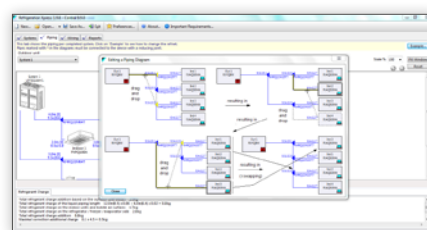

Business portal: my.daikin.eu

- › Experience our new extranet that thinks with you at **my.daikin.eu**.
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

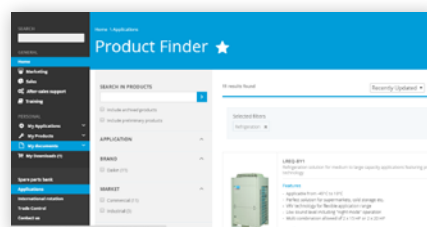

Daikin product finder


For an overview of refrigeration products or if you want to make a comparison, please refer to **www.daikineurope.com/commercial/products**

Troubleshooting and commissioning

Service checker

The service checker is a monitoring tool which keeps your system trouble-free and working with top efficiency.

- › Ideal for troubleshooting and commissioning
- › Direct graphical parameter display

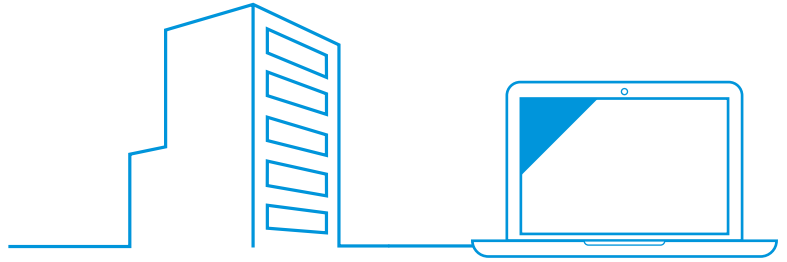


Modbus communication kit

BRR9B1V1

This Modbus communication interface lets you integrate ZEAS and Conveni-Pack systems fully with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol. In this way, refrigeration professionals can create reliable and energy-optimised shop concepts, including remote monitoring applications.

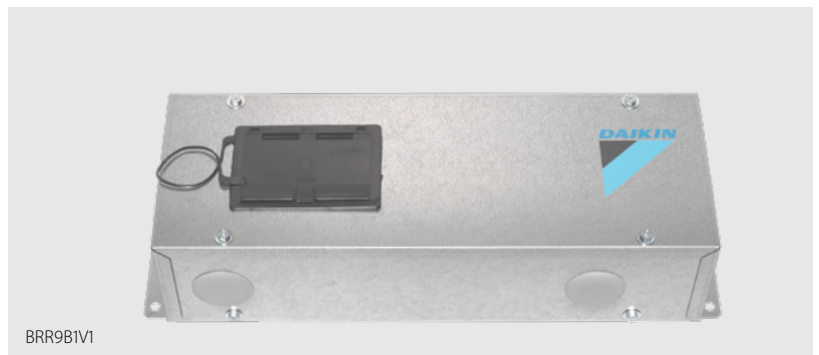

BRR9B1V1

Display values

- › Model information and operating status
- › Refrigerant operating pressure and temperatures
- › Electrical operating data and temperatures for components
- › Target values
- › Fan stage and compressor frequency, operating hours
- › Warning and error messages, as well as system safety functions

Control values

- › Target evaporation temperature
- › Forced stop
- › Error messages can be cancelled remotely




KEEP COOL, SAVE MONEY

Daikin refrigeration products are designed to reduce environmental impact. Daikin systems also set industry standards when it comes to energy efficiency. Which enables you to save money while you help to save the planet.

Learn more at www.daikineurope.com/refrigeration

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.